



SPECIALISTS IN OZONE TECHNOLOGY

120g @ 5% Wt.

90g @ 10% Wt.



MAXIMUMS

Ambient Temperature	120 °F
Block Temperature	190 °F
Devices Temperature	200 °F
Voltage	280 VAC
Pressure	98 psi

ELECTRICAL RATINGS

Voltage	1Φ 240 VAC
Current	8.23 Amps
Frequency	50 / 60 Hz
Power	1050 Watts

PERFORMANCE

Model	Pressure	Flow	Std. Flow
G1	15 psi	22 LPM	25 SLPM
G1E	10 psi	25 LPM	31 SLPM
G2	20 psi	11 LPM	15 SLPM
Heat Load	3400 BTU/hr		
Cooling	Fan cooled		


OTHER SPECIFICATIONS

	SI	Metric
Weight	69 lbs.	31.3 kg
Length	15.52 in.	394.2 mm
Width	12.74 in.	323.6 mm
Height	11.76 in.	298.7 mm

- Microprocessor controlled
- UL Listed
- Microchannel design
- Precise ozone control

SAFE EFFICIENT
SILENT ADVANCED

120g Gen1 Enhanced at 10 PSI

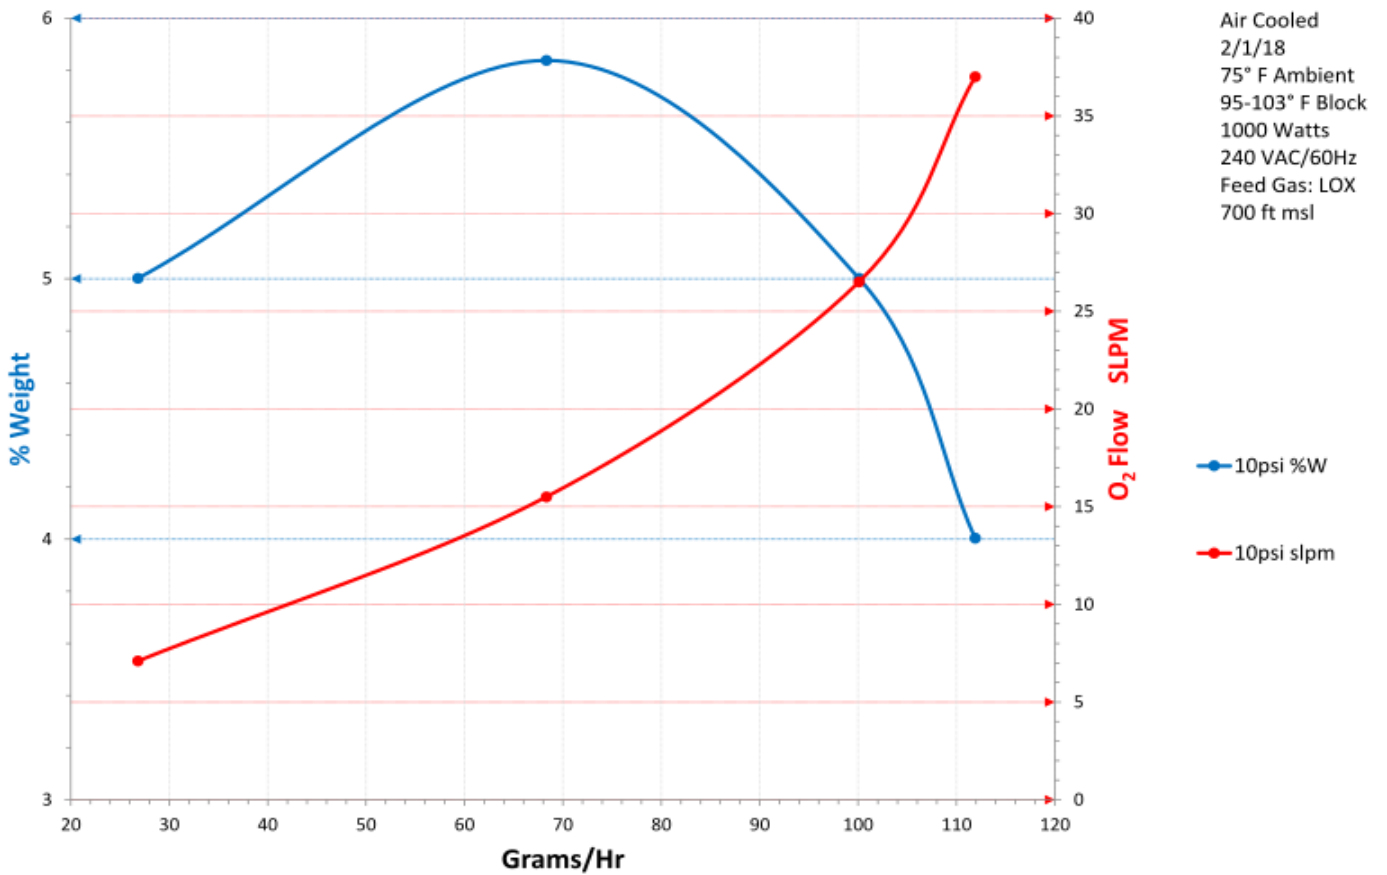

120g Gen2 at 20 PSI

