



SPECIALISTS IN OZONE TECHNOLOGY

170g @ 5% Wt.

140g @ 10% Wt.



ELECTRICAL RATINGS

Voltage	1Φ 240 VAC
Current	10 Amps
Frequency	50 / 60 Hz
Power	1400 Watts

PERFORMANCE

Model	Pressure	Flow	Std. Flow
G1E	10 psi	25 LPM	31 SLPM
G2	20 psi	11 LPM	17 SLPM
Heat Load		4800 BTU/hr	
Cooling		Fan cooled	

MAXIMUMS


Ambient Temperature	105 °F
Block Temperature	160 °F
Devices Temperature	200 °F
Voltage	264 VAC
O2 Pressure	100 psi

OTHER SPECIFICATIONS


	SI	Metric
Weight	65 lbs.	29.5 kg
Length	18.13 in.	460.5 mm
Width	12.25 in.	311.2 mm
Height	9.5 in.	241.3 mm

- Microprocessor controlled
- UL Listed
- Microchannel design
- Precise ozone control

SAFE EFFICIENT
SILENT ADVANCED

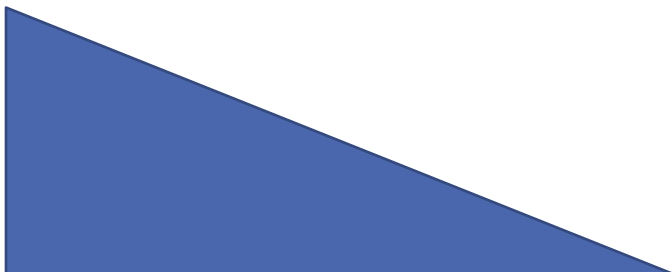

170g Gen1 Enhanced

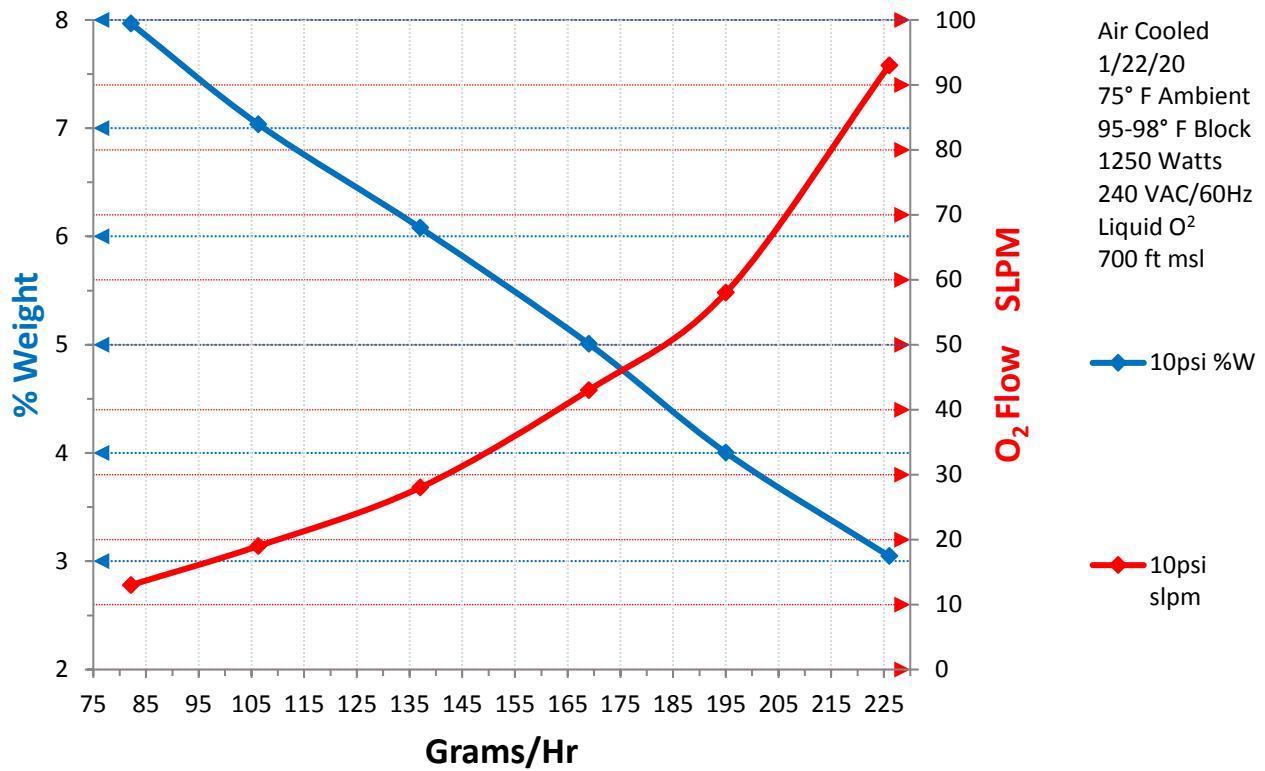

140g Gen2 at 20 PSI

