



SPECIALISTS IN OZONE TECHNOLOGY

**20g @ 5% Wt.**

**17g @ 10% Wt.**

### ELECTRICAL RATINGS

Voltage	1Φ 120 / 240 VAC
Current	1.97 / 1.16 Amps
Frequency	50 / 60 Hz
Power	235 Watts

### PERFORMANCE

Model	Pressure	Flow	Std. Flow
G1	10 psi	4.5 LPM	5.5 SLPM
G1E	10 psi	5 LPM	6.5 SLPM
G2	20 psi	1.5 LPM	2.2 SLPM
Heat Load	890 BTU/hr		
Cooling	Fan cooled		



### MAXIMUMS

Ambient Temperature	120 °F
Block Temperature	190 °F
Devices Temperature	200 °F
Voltage	280 VAC
Pressure	100 psi


### OTHER SPECIFICATIONS

	SI	Metric
Weight	14 lbs.	6.4 kg
Length	13.09 in.	332.5 mm
Width	6.69 in.	169.9 mm
Height	6.01 in.	152.7 mm


- Microprocessor controlled
- UL Listed
- Microchannel design
- Precise ozone control

**SAFE      EFFICIENT**  
**SILENT    ADVANCED**

### 20g Gen1 Enhanced at 5 PSI

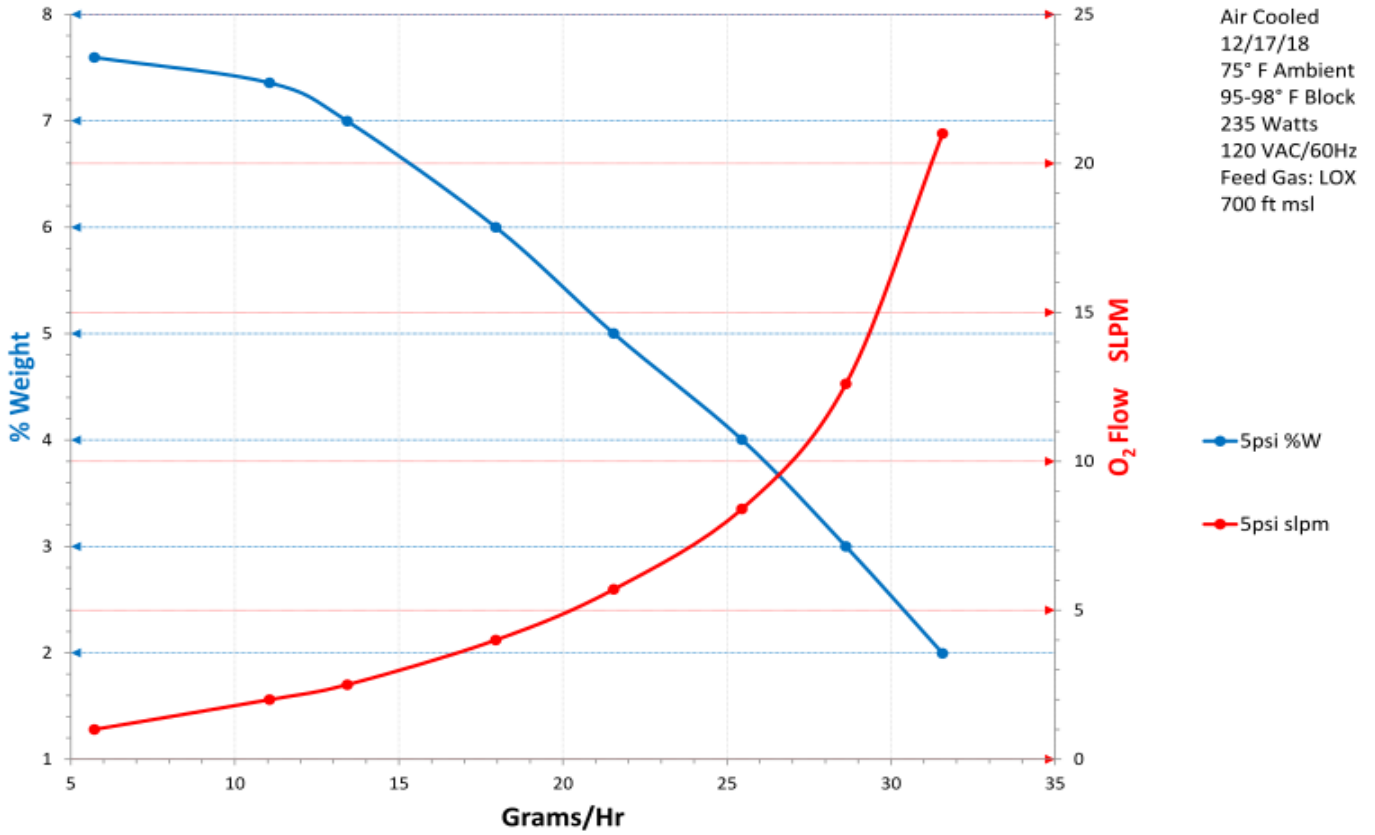

### 20g Gen1 at 5 PSI

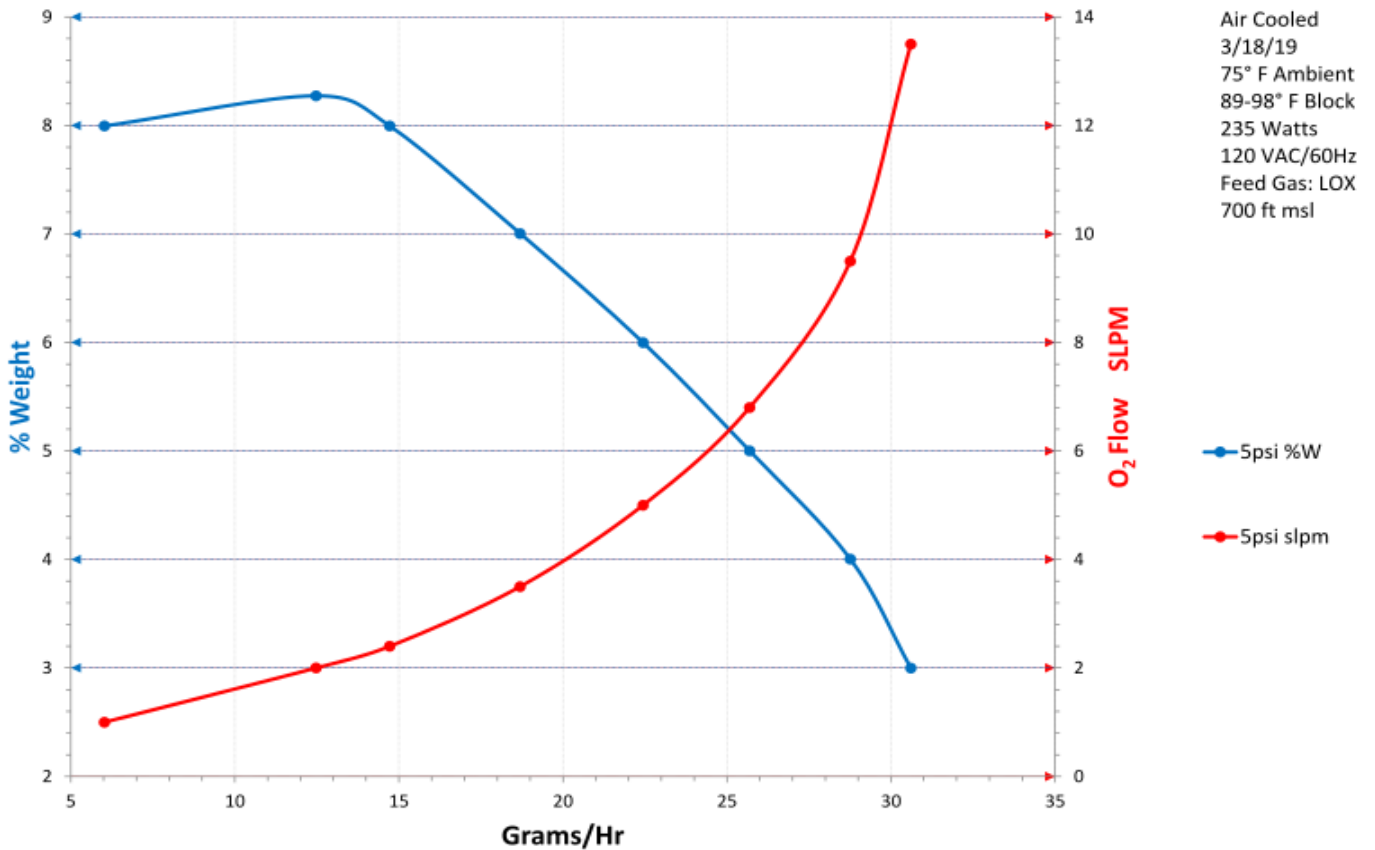

### 20g Gen2 at 15 PSI

