



SPECIALISTS IN OZONE TECHNOLOGY

**30g @ 5% Wt.**


**28g @ 10% Wt.**

**ELECTRICAL RATINGS**

Voltage	1Φ 120 / 240 VAC
Current	3.2 / 2.4 Amps
Frequency	50 / 60 Hz
Power	275 Watts

**PERFORMANCE**

Model	Pressure	Flow	Std. Flow
G1	10 psi	5 LPM	7 SLPM
G1E	10 psi	6.5 LPM	8.5 SLPM
G2	20 psi	2.5 LPM	3.5 SLPM
Heat Load	850 BTU/hr		
Cooling	Fan cooled		

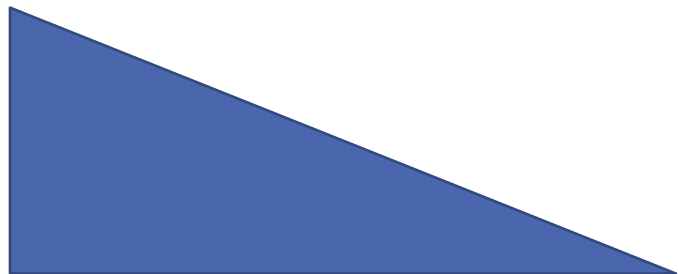

**MAXIMUMS**

Ambient Temperature	120 °F
Block Temperature	190 °F
Devices Temperature	200 °F
Voltage	140 / 280 VAC
Pressure	86 psi


**WEIGHT AND DIMENSIONS**

	SI	Metric
Weight	23 lbs.	10.4 kg
Length	17.75 in.	450.9 mm
Width	12.00 in.	304.8 mm
Height	5.50 in.	139.7 mm


- Microprocessor controlled
- UL Listed
- Microchannel design
- Precise ozone control

**SAFE      EFFICIENT**  
**SILENT    ADVANCED**

### 30g Gen1 at 10 PSI

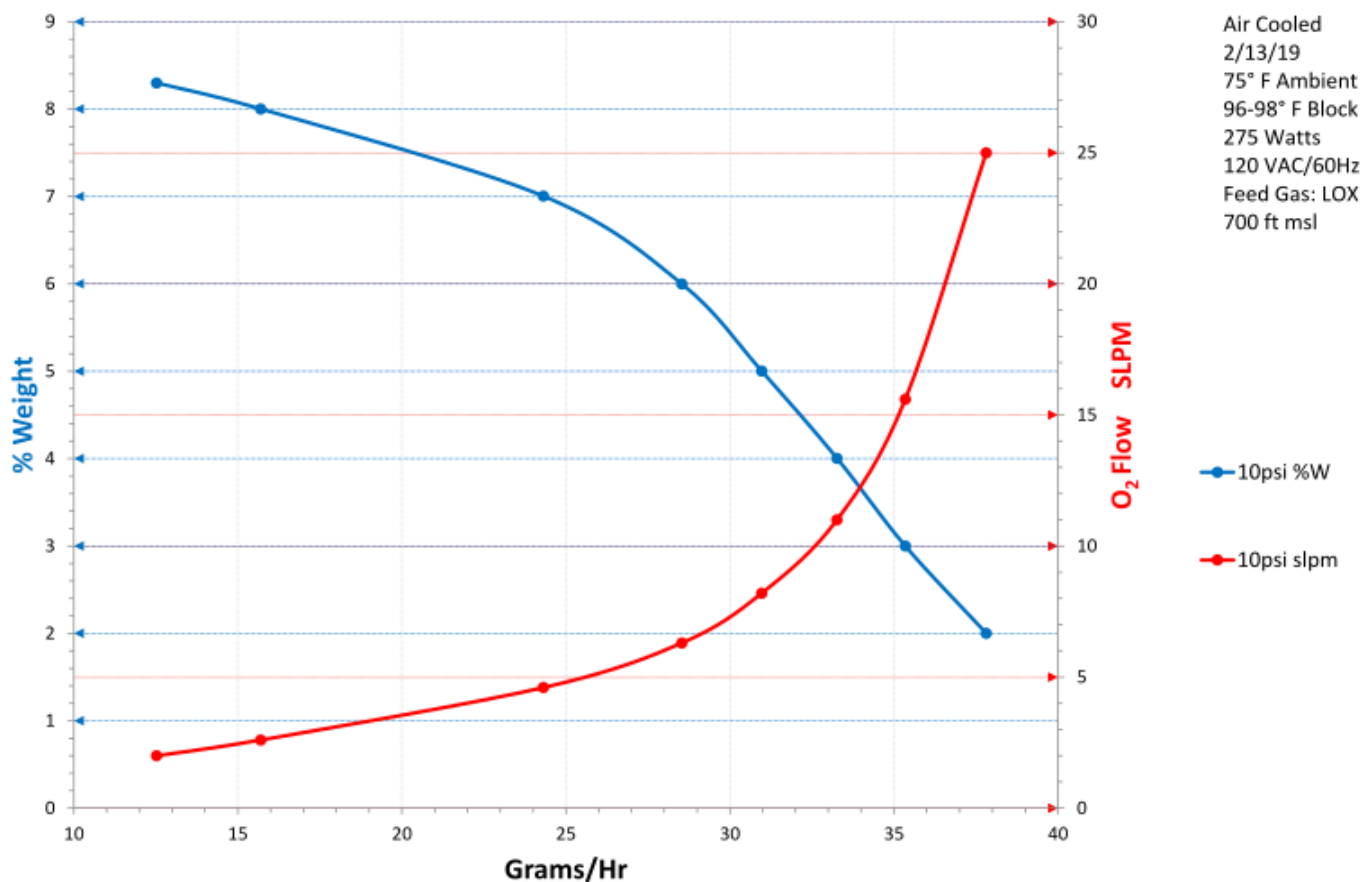

### 30g Gen1 Enhanced at 10 PSI

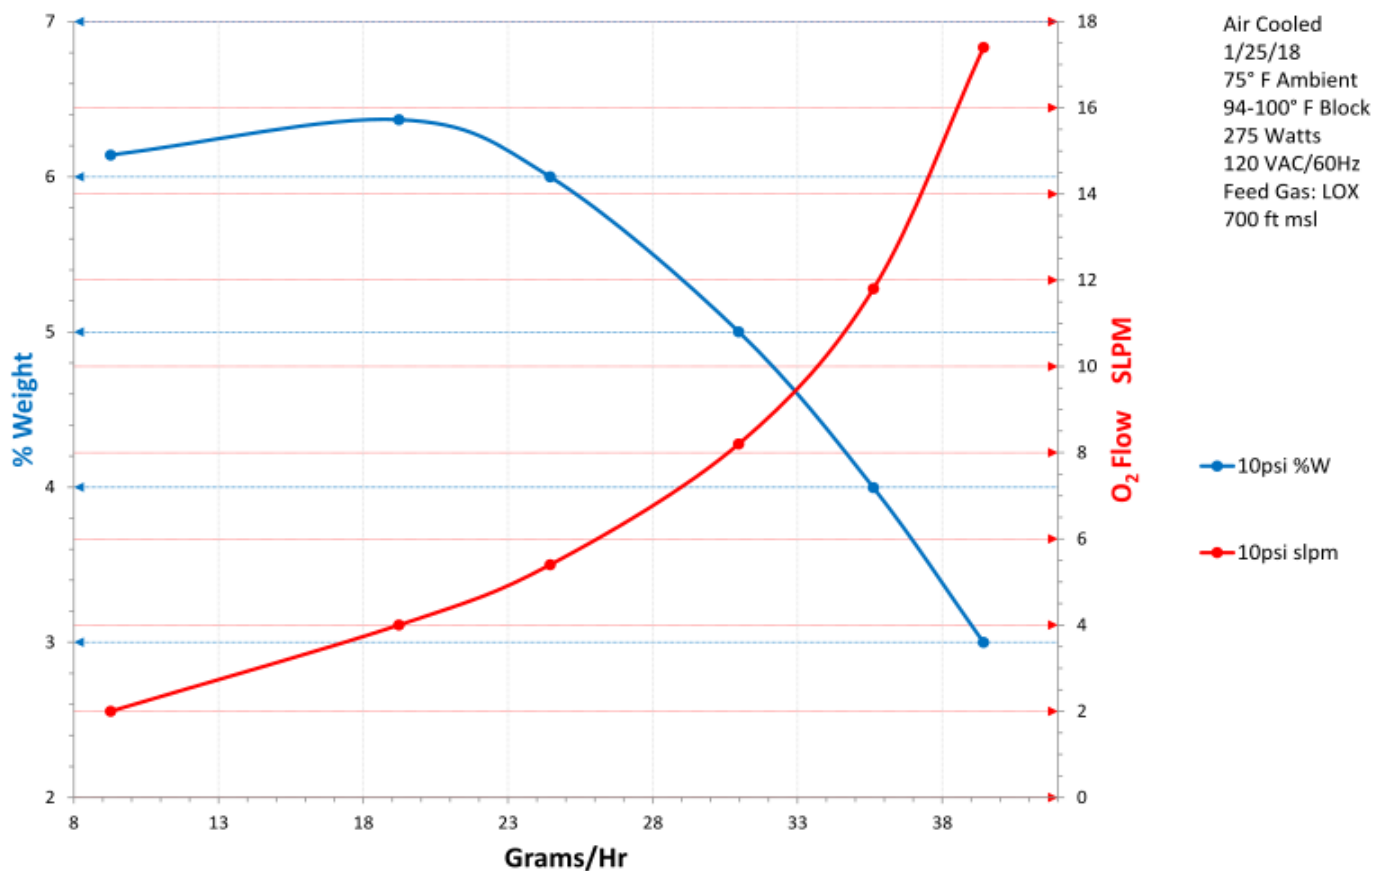

### 30g Gen2 at 20 PSI

