



SPECIALISTS IN OZONE TECHNOLOGY

45g @ 5% Wt.


37g @ 10% Wt.

ELECTRICAL RATINGS

Voltage	1Φ 120 / 240 VAC
Current	4.8 / 3.7 Amps
Frequency	50 / 60 Hz
Power	440 Watts

PERFORMANCE

Model	Pressure	Flow	Std. Flow
G1	10 psi	9 LPM	12 SLPM
G1E	-	-	-
G2	20 psi	3.5 LPM	5 SLPM
Heat Load	1500 BTU/hr		
Cooling	Fan cooled		

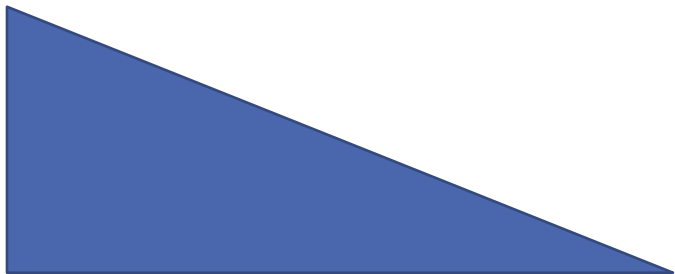

MAXIMUMS

Ambient Temperature	120 °F
Block Temperature	190 °F
Devices Temperature	200 °F
Voltage	140 / 280 VAC
Pressure	100 psi


OTHER SPECIFICATIONS

	SI	Metric
Weight	19 lbs.	8.6 kg
Length	14.50 in.	368.3 mm
Width	8.13 in.	206.5 mm
Height	6.44 in.	163.6 mm

- Microprocessor controlled
- UL Listed
- Microchannel design
- Precise ozone control

SAFE EFFICIENT
SILENT ADVANCED

50g Gen1 at 10 PSI

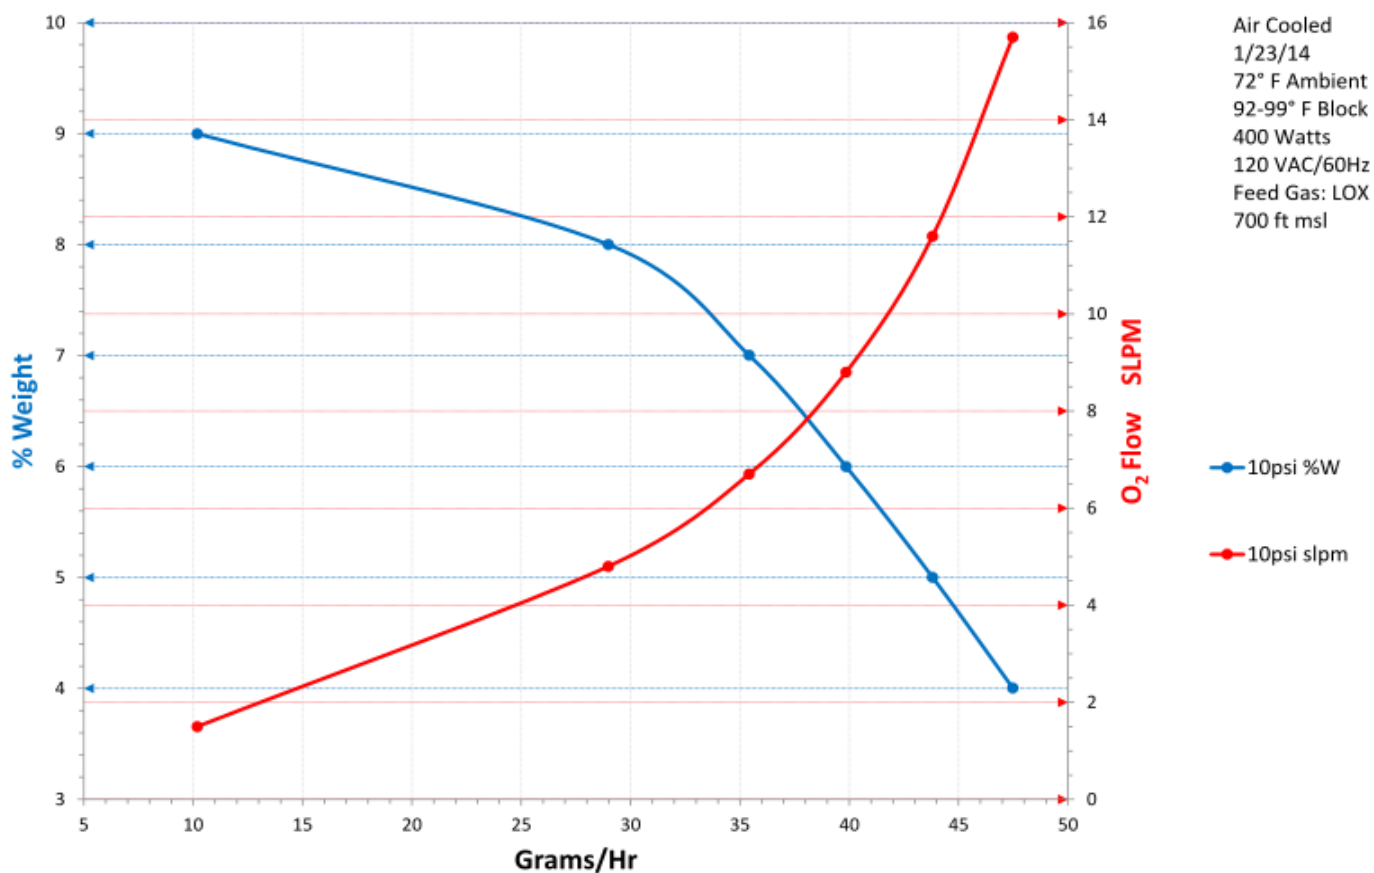

50g Gen2 at 20 PSI

