



SPECIALISTS IN OZONE TECHNOLOGY

70g @ 5% Wt.

65g @ 10% Wt.

ELECTRICAL RATINGS

Voltage	1Φ 120 / 240 VAC
Current	8.5 / 5.0 Amps
Frequency	50 / 60 Hz
Power	740 Watts

PERFORMANCE

Model	Pressure	Flow	Std. Flow
G1	10 psi	15 LPM	18 SLPM
G1E	10 psi	19 LPM	23 SLPM
G2	20 psi	6 LPM	8 SLPM
Heat Load	2400 BTU/hr		
Cooling	Fan cooled		



MAXIMUMS

Ambient Temperature	120 °F
Block Temperature	190 °F
Devices Temperature	200 °F
Voltage	140 / 280 VAC
Pressure	100 psi


OTHER SPECIFICATIONS

	SI	Metric
Weight	50 lbs.	22.7 kg
Length	16.24 in.	412.5 mm
Width	11.45 in.	290.8 mm
Height	7.18 in.	182.3 mm


- Microprocessor controlled
- UL Listed
- Microchannel design
- Precise ozone control

SAFE EFFICIENT
SILENT ADVANCED

70g Gen1 at 10 PSI

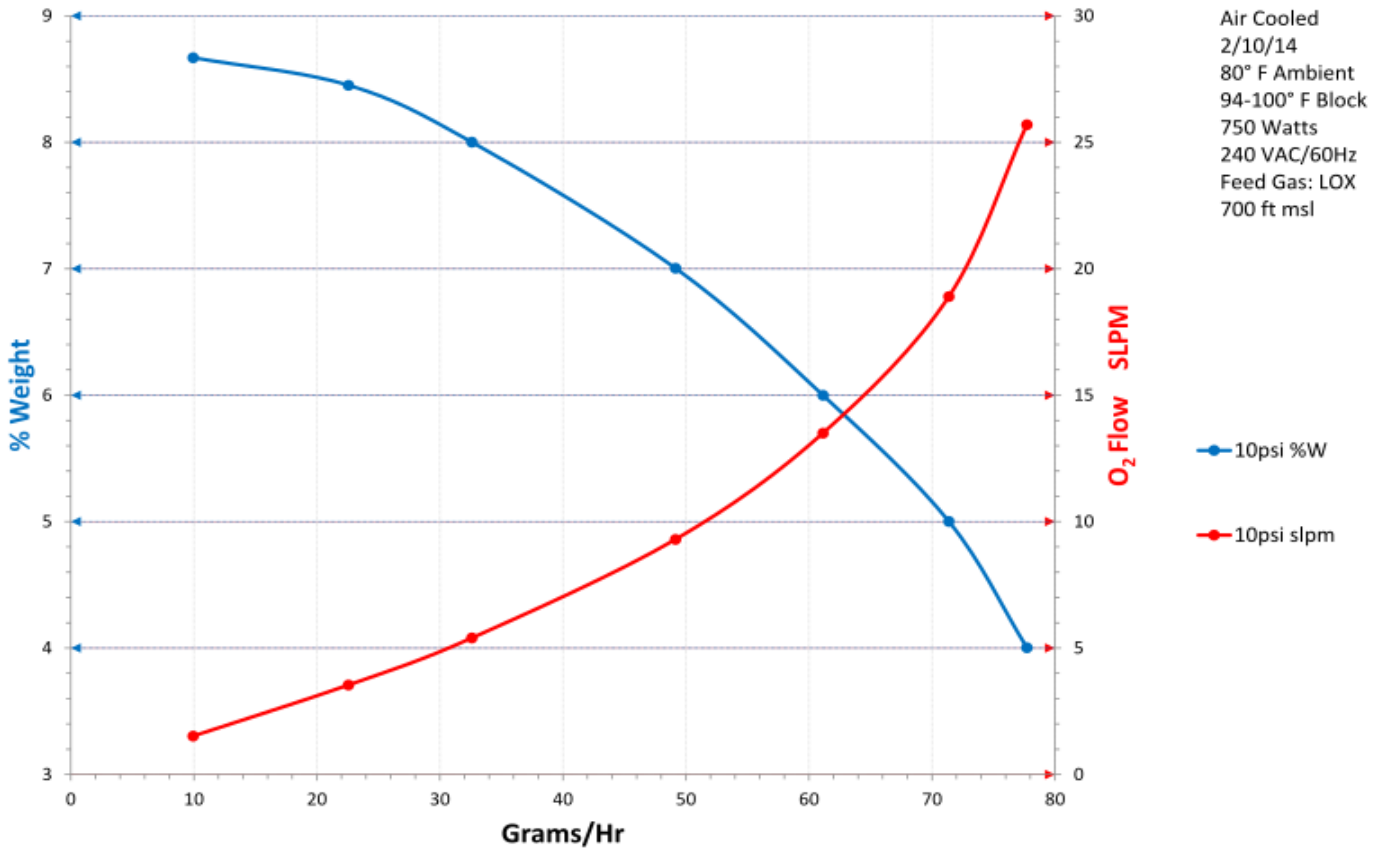

70g Gen1 Enhanced at 10 PSI

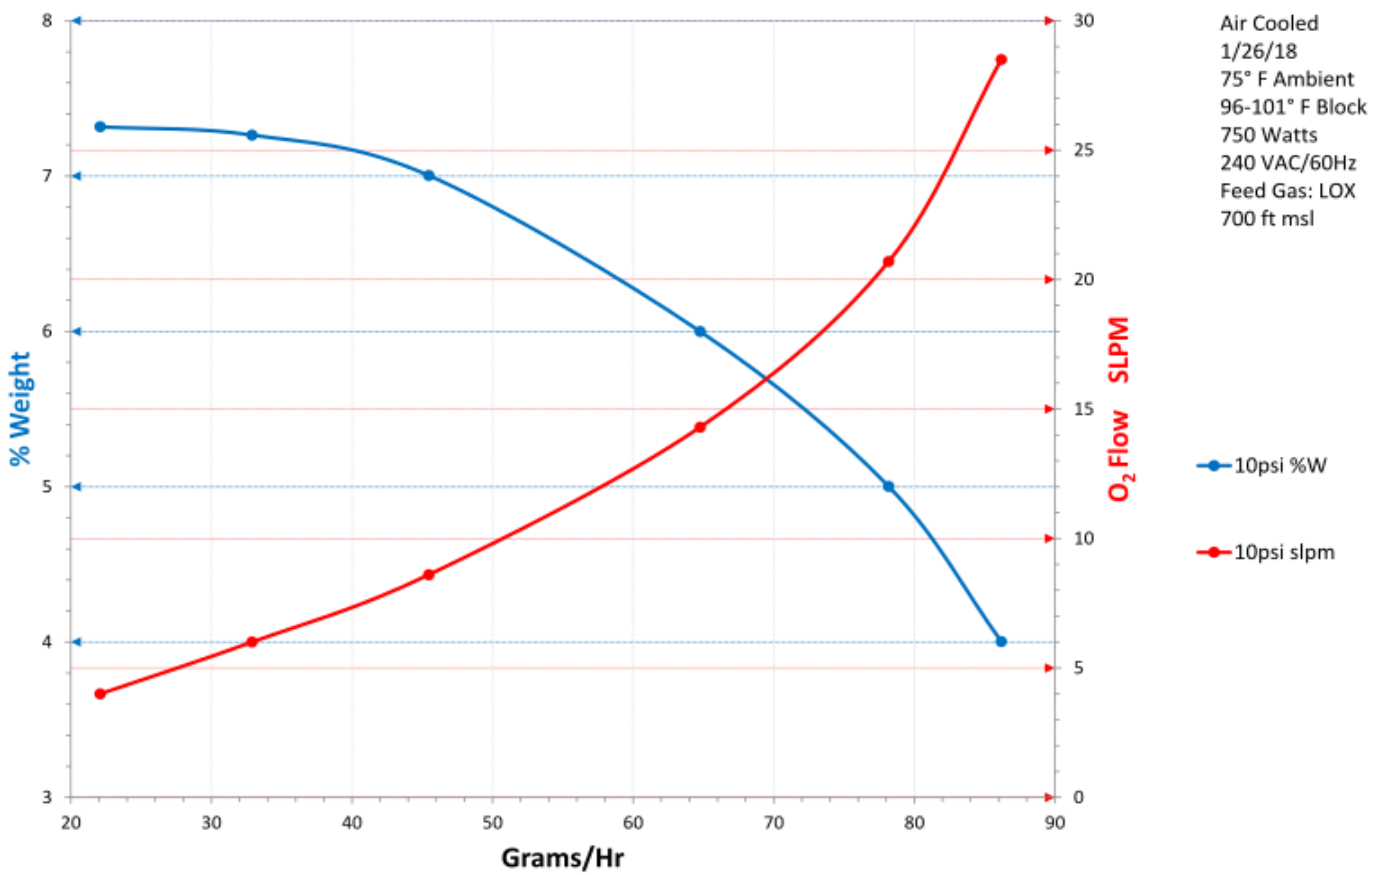

70g Gen2 at 20 PSI

